


The LEROY-SOMER offer

**DIGIDRIVE SK**



**Gearboxes**

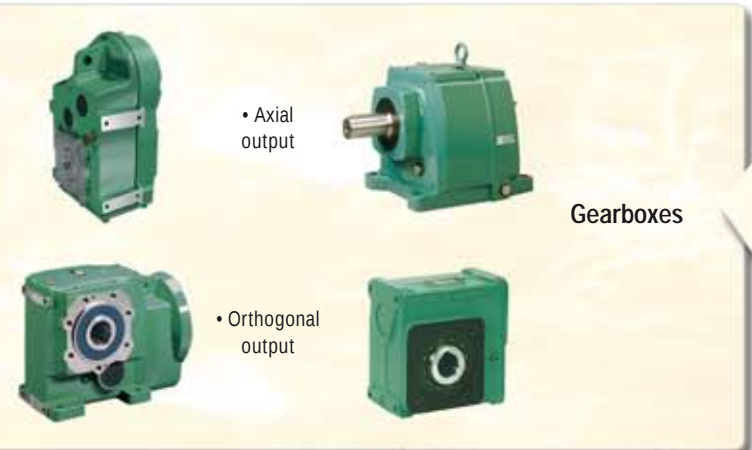

**Motors**




3905 en - 2008.04 / b

**Characteristics**

P <sub>mot</sub> (kW)	Mains supplies												Dimensions and weights				
	Single phase 110 V		Single phase 230 V		3-phase 230 V		3-phase 400 V		3-phase 575 V		3-phase 690 V		Size	H mm	W mm	D mm	Weight kg
	Rating	Size	Rating	Size	Rating	Size	Rating	Size	Rating	Size	Rating	Size					
0.25	0.25 ML - 1A	0.5 M - 1A											1A	154	75	145	0.9
0.37	0.37 ML - 1A	1 M - 1A					1 T - 1B						1B	205	85	156	1.3
0.55	1.5 ML - 1B	1.2 M - 1A					1.2 T - 1B						1C	258	100	173	2
0.75	1.5 ML - 1B	1.5 M - 1A					1.5 T - 1B						1D	335	115	198	4.5
1.1	2 ML - 1B	2 M/TL - 1B			2 M/TL - 1B		2 T - 1B						2	368	155	219	7
1.5		2.5 M/TL - 1B			2.5 M/TL - 1B		2.5 T - 1B						3	368	250	260	15
2.2		3.5 M/TL - 1C			3.5 M/TL - 1C		3.5 T - 1C		3.5 TM - 3				4	510	310	298	30
3		4.5 M/TL - 1D			4.5 M/TL - 1D		4.5 T - 1C		4.5 TM - 3	4.5 TM - 3			5	820	310	298	55
4		5 TL - 1D			5 TL - 1D		5.5 T - 1C		5.5 TM - 3	5.5 TM - 3			6	1131	310	298	75
5.5		8 TL - 2	5.5 TL - 2		8 TL - 2	5.5 TL - 2	7 T - 1D		8 TM - 3	8 TM - 3							
7.5		11 TL - 3	8 TL - 2		11 TL - 3	8 TL - 2	10 T - 1D	8 T - 2	11 TM - 3	8 TM - 3							
11		16 TL - 3	11 TL - 3		16 TL - 3	11 TL - 3	16 T - 2	11 T - 2	16 TM - 3	11 TM - 3							
15		22 TL - 4	16 TL - 3		22 TL - 4	16 TL - 3	22 T - 3	16 T - 2	22 TM - 3	16 TM - 3							
18.5		27 TL - 4	22 TL - 4		27 TL - 4	22 TL - 4	27 T - 3	22 T - 3	33 TH - 4	22 TH - 3	22 TH - 4						
22		33 TL - 4	27 TL - 4		33 TL - 4	27 TL - 4	33 T - 3	27 T - 3	40 TH - 4	33 TH - 4	33 TH - 4						
30							40 T - 4	33 T - 3	50 TH - 4	40 TH - 4	40 TH - 4						
37							50 T - 4	40 T - 4	60 TH - 4	50 TH - 4	50 TH - 4						
45							60 T - 4	50 T - 4	75 TH - 5	60 TH - 4	60 TH - 4						
55							75 T - 5	60 T - 4	100 TH - 5	75 TH - 5	75 TH - 5						
75							100 T - 5	75 T - 5	120 TH - 6	100 TH - 5	100 TH - 5						
90							120 T - 6	100 T - 5	150 TH - 6	120 TH - 6	120 TH - 6						
110							150 T - 6	120 T - 6		150 TH - 6	150 TH - 6						
132								150 T - 6			150 TH - 6						

P<sub>mot</sub> : motor output power for the mains voltages shown above



LEROY-SOMER 16015 ANGOULÊME CEDEX - FRANCE  
338 567 258 RCS ANGOULÊME  
S.A. au capital de 62 779 000 €

www.leroy-somer.com

**DIGIDRIVE SK**  
**Open loop variable speed drive**  
**for induction motors**



