




# **POULIBLOC 2000**

## **Shaft mount speed reducer**

# POULIBLOC 2000

with exclusive taper bushing feature

Available in 8 sizes up to 55 kW  
4 standard reduction ratios  
1/5 - 1/12 - 1/20 - 1/25

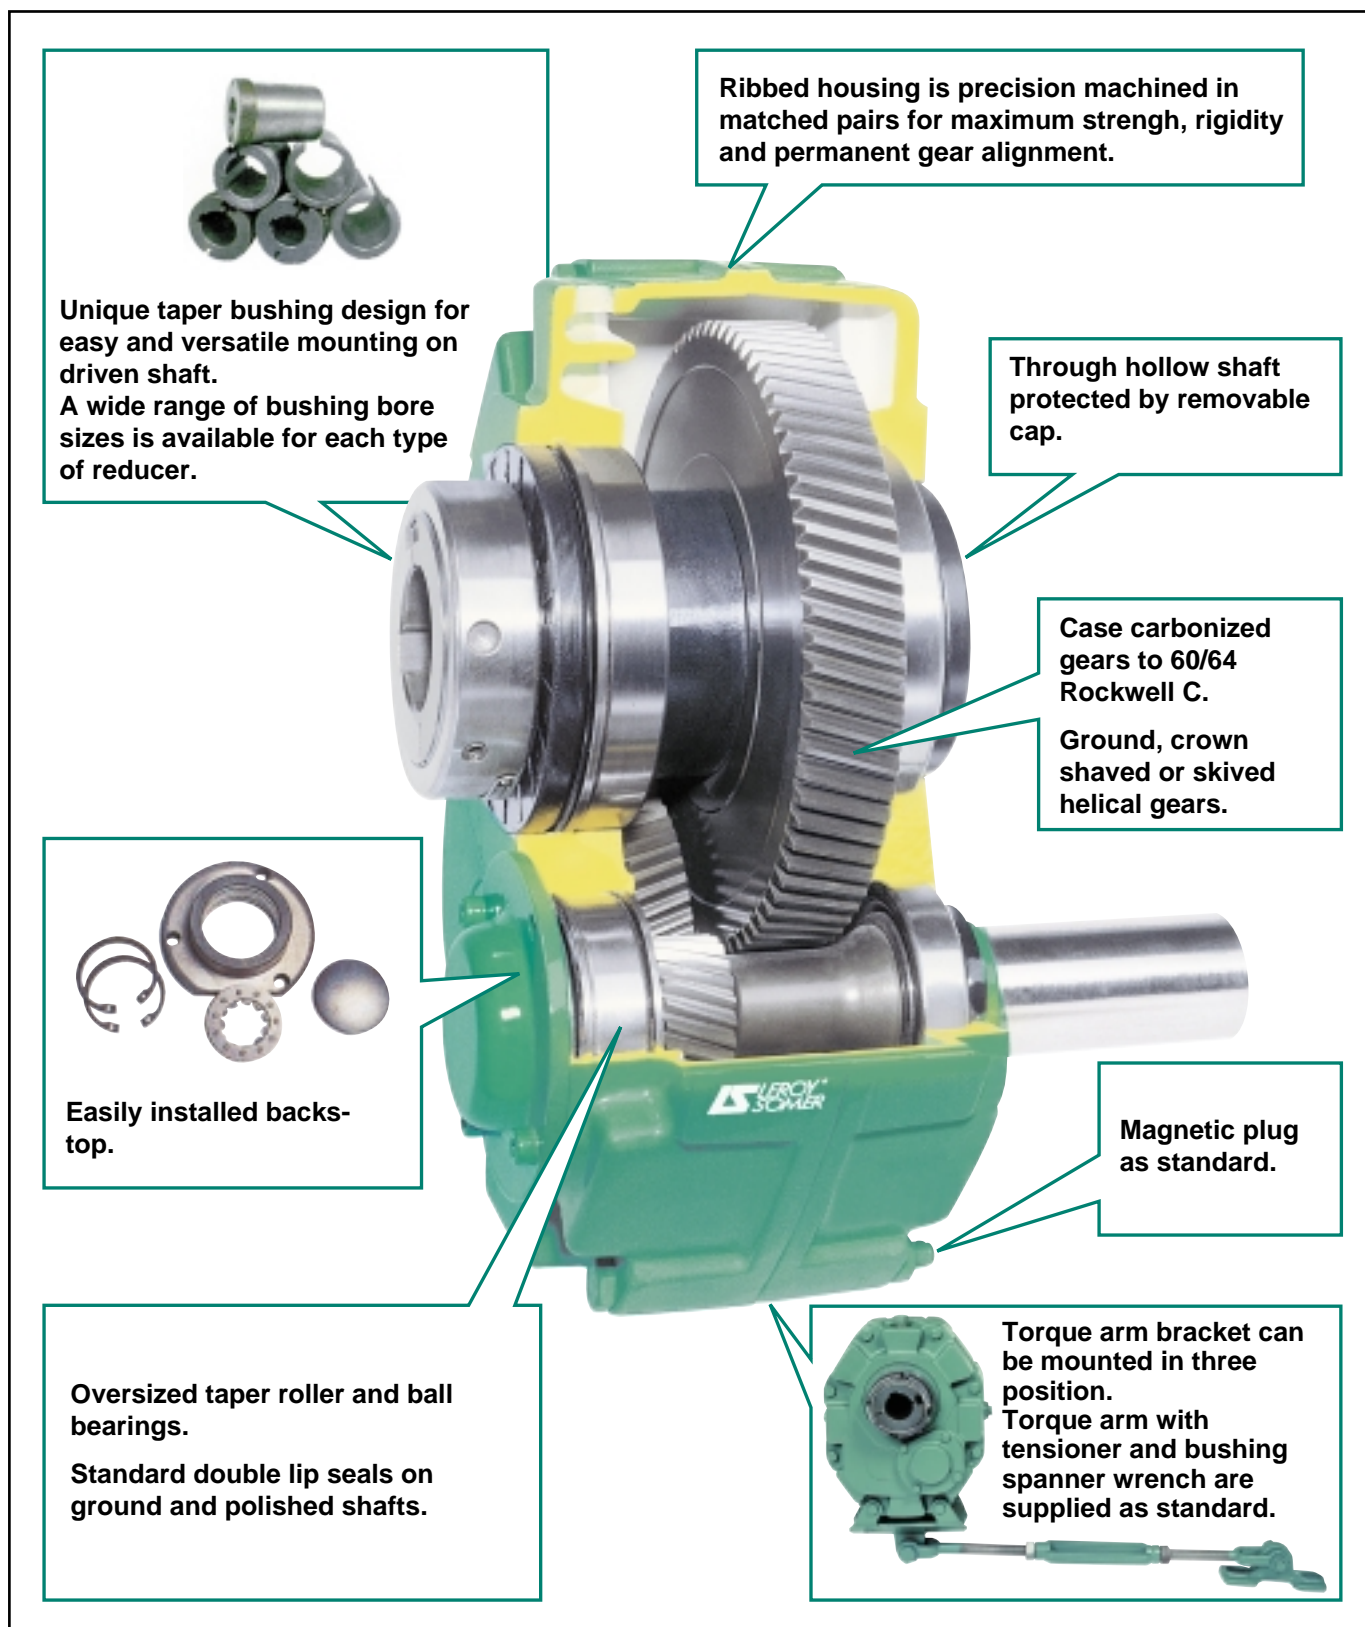



---

## OTHER PRODUCT AVAILABLE IN POULIBLOC RANGE



### **POULIBLOC 3000**


Single reduction gearbox - Reduction ratio 1/2 to 1/8  
Cylindrical bore. Economical series.  
Available in 3 sizes up to 11 kW, with oil or grease  
lubrication.

---

#### ▼ Belt conveyor drive



#### ▼ Screw conveyor drive

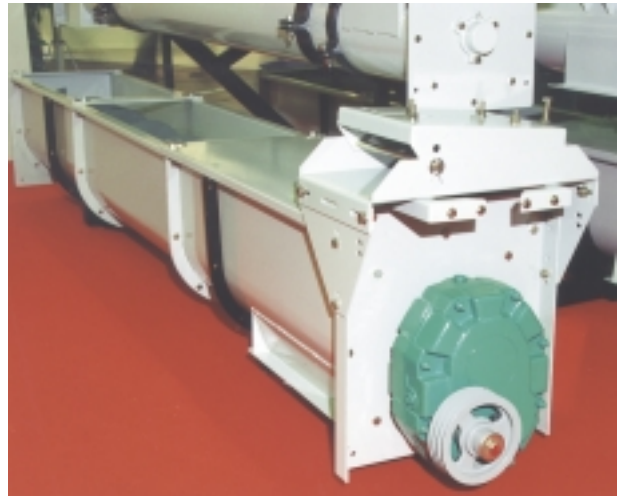

**POULIBLOC range is available from the shelf**